

TELESCOPIC FORKLIFT JMT 30

Tel: 01564 336633 Email: sales@JMacUK.com

Web: www.jmacuk.com J Mac Excavators Ltd



EFFICIENCY AND COST OF OWNERSHIP

JMAC JMT30 TELESCOPIC FORKLIFT DOES EVERYTHING A MASTED FORKLIFT DOES... AND MORE.

REDUCING COST OF OWNERSHIP, SAVES YOU TIME, FUEL, MANPOWER AND YARD

LOADING SPACE. ADD TELESCOPIC FORKLIFT POTENTIAL TO REPLACE SEVERAL MACHINES, WHICH MEANS YOU DON'T NEED AS

MANY MASTED FORKLIFTS IN YOUR FLEET, AND THE RESULT IS MAXIMUM EFFICIENCY AND PRODUCTIVITY.



Designed specifically for WELIFT forklift, The Xinchai brand diesel engine is the Chinese forklift main supplier.

It adopts a number of advanced diesel engine design techniques and manufacturing processes independently developed by the company. It is highly praised by forklift users.

Reliable quality, easy to start in winter, with fuel-saving technologies, Compact structure and easy maintenance.

And can meet the requirements of European III emission regulations.





Yanmar Novel CAE technologies were used to obtain the best muffler volumes and soundproofing materials.

has made JMT 30 forklift noise more lower.

Indirect Injection engine, clean exhaust.

Can meet the requirements of European III &
EPA III emission regulations.

YANMAR 4TNE98 in option.

YANMAR YANMAR 42KW


OPERATIONAL EFFICIENCY

Thanks to the telescopic boom JMT30, you can load

and unload a lorry trailer from only one side. This results in up to 50% yard loading space saving; you can use the rest of the loading space for other duties and there is also no need to spend extra time

Crossing obstacles to take the goods



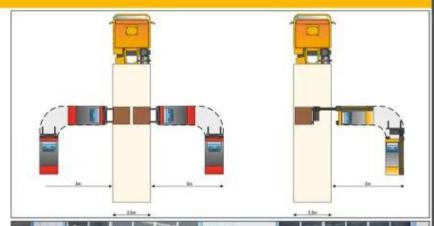






Model	JMT 30	JMT 30
Engine Manufacturer	XINCHAI / XINCHAI 498	YANMAR
Tier compliant	Tier 2 stage II / Tier 3 stage III	Tier 3 stage III
Engine model	C490BPG / A 498 BPG1	4TNE98
Engine output (gross power) kw	36.8	42.1
Cubic capacity em	2670 / 3168	3319
Rated rps	2600	2600
Number of cylinders	4	4
Working pressure bur	190	190
Maximum reach boom horizontal (500mm load centre) mm	2380	2380
Turning radius mm	2500	2500
Weight unladen kgs	4750	4700
Travel speed km/h	20	20
Gradeability (laden / unladen) %	25/21	25/21
Transmission	Electro-hydraulic automatic	Electro-hydraulic automatic
Park brake type	Hand	Hand
Tyres (Front)	28x9-15	28x9-15
Tyres (Rear)	6,50-10	6,50-10
Diesel tank capacity L	56	56


Α	Lift height	mm	4060
В	Free lift	mm	1400
C	Height (Boom extended).	mm	4680
D	Height of overhead guard	mm	2300
E	Height of operators seat (high/low)	.mm	1200 / 1150
F	Length to fork face	mm	2850
G	Wheelbase	mm	1680
н	Distance from c/l of front axle to fork face	mm	600

1	Distance from c/l of front axle to fork face (full height)	mm	850	
K	Lond centre	mm	500	
L,	Lift capacities (with side shifter)	kg	3000	
M	Ground clearance (lowest point)	mm	200	
N	Ground clearance (wheelbase centre)	mm	190	
0	Fork carriage width	nom	1280	
P	Maximum width of machine	mm	1400	
Q	Carriage tilt total* F/B variable through lift arc	degrees	111	









Forward reach

Telescopic forklift JMT 30 attachments, plus compatibility with the full range of industry specific attachments, gives you huge flexibility and the ability to work in a wide range of applications.

111 degrees of carriage rotation makes handing of unpalletised goods much easier and safer. Access all areas.

The telescopic boom allows single-side loading, loading to the far side of rail wagons by reaching across the platform gap, reaching inside sprinter vans and loading of ships by reaching across from the quayside.

JMT30 MAKE EVERYTHING EASY

Fully tilting cab.

Ground-level access to all the major components and service interval checks is quick and easy through the side-opening door and tilting cab.

The operators daily checks are behind the side door.

Diesel tank

The diesel tank is also within easy reach, and there's an unobstructed view of the indicator.

Gauge board
Succinct and gener gauge board
make you easy read.

Joy stick

JMT30 has made all function in one joy stick, even the drive.



