J Mac



Item	Goods Description	Quantity				
1	JME90B Excavator	1				
PARAME	CRERS		-			
Operating	Weight		8460KG			
Bucket Capacity			0.45 m^3			
Hydraulic System Pressure			25 MPa			
Hydraulic System Flow			75×2 (L/min)			
Bucket Dig	gging Force		55 KN			
Arm Digg	ing Force		32 KN			
Gradeabili	ty		70°			
Rotation S	peed		13 (r/min)			
Travel Spe	eed		2.3/4.5 (km/h)			
Engine						
Brand			Yanmar 4TNV98T			
Power	Power		54.3kw/2200 rpm			
	Dimensions					
	Width * Height		6300*2380*2700mm			
Track Length			2760mm			
Track Width			450mm			
	nce Specifications					
Min.Swing Radius			1933mm			
Max. Dig Radius at Groundline			6370mm			
Max. Dig Depth			4150mm			
Max. Dig Height			7300mm			
Max. Dump Height			5200mm			

Main dimensions:

a	Shipping Length	6300 (mm)
b	Shipping Height	2700 (mm)
c	Overall Width	2380 (mm)
d	Track Shoe Width	450 (mm)
e	Radius, Swing Center to Rear End	1933 (mm)
f	Track Shoe Length	2760 (mm)
g	Track Gauge	1810 (mm)
h	Min Ground Height	380(mm)
j	Steering Width	2200 (mm)

Working range:


a	Max. Digging Height	7300 (mm)
b	Max. Dumping Height	5200 (mm)
c	Max. Digging Depth	4150 (mm)
d	Max. Digging Radius	6370 (mm)

Specifications

Engine Type	YM4TNV98T	
Power	54.3/2200 (kw/rpm)	
Hydraulic System Pressure	25 (MPa)	
Hydraulic System Flow	75×2 (L/min)	
Bucket Volume	0.45 (m³)	
Bucket Digging Force	55 (kN)	
Arm Digging Force	32 (kN)	
Gradeability	70	
Rotation Speed	13 (r/min)	
Travel Speed	2.3/4.5 (km/h)	
Approximate Weight	8460(kg)	

ACCES	ACCESSORIES					
Item	Goods Description	Quantity	Unit Price	Amount		
1	our standard color	1	£0	£0		
2	Model number JME90B	1	£0	£0		
3	Air/Con	1	£575	£575		
4	Road Liner Rubber Tracks	1	£810	£810		
5	Orange Beacon	1	£0	£0		
6	Travel bleep alarm	1	£0	£0		
7	Tool box	1	£0	£0		
8	Hydraulic quick Hitch	1	£1320	£1320		
9	electronic valves	2	£0	£0		
10	Green beacon seat belt	1	£70	£70		
11	Dozer blade	1	£0	$\mathfrak{L}0$		



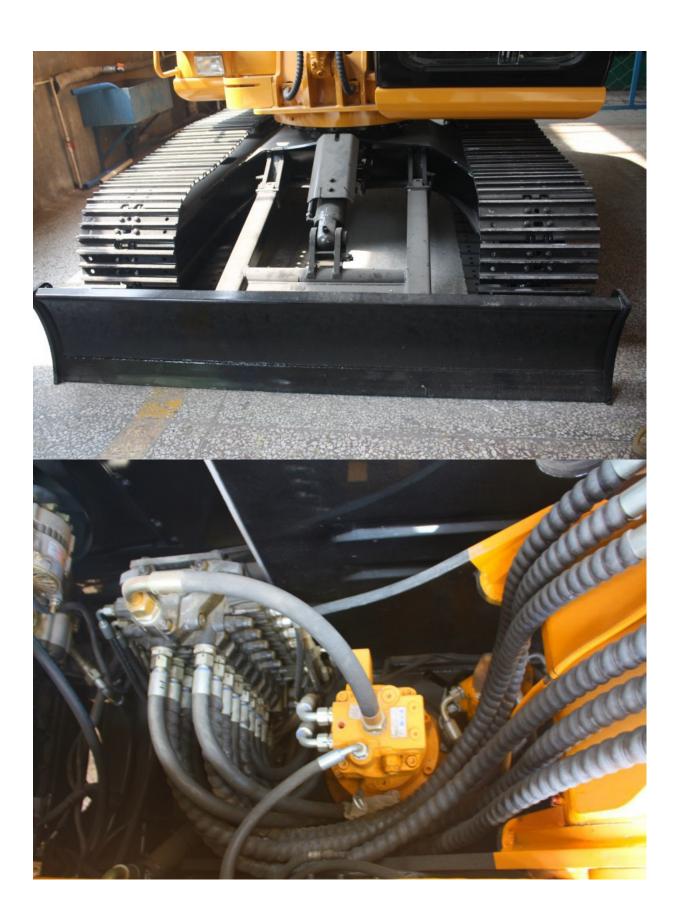

Hydraulic quick hitch £1320, with pipeline; Breaking hammer pipeline is standard; Rotary wood grabber also uses breaker to get pipes, and 2 additional electronic valves are needed, 2 electronic valves

Our main valve has a load sensing system to prevent the boom from dropping suddenly. In addition, hydraulic safety lock is standard

Warranty

- 12 months warranty labour & parts, 2nd and 3rd year partsonly
- ▲ YANMAR engine, strong power, high efficiency and energy saving
- ▲ Imported Kawasakihydraulic system, good compound action coordination, high efficiency
- **▲** Carefully designed structure and working device, reliable and durable
- ▲ Humanized design, comfortable operation and convenient maintenance