


JMT1500 Telehandler



Italy Hydrostatic Transmission, Perkins Engine Tier 3b, 4 Wheel Drive Motors, Eaton Steering Motor, Luxury Cabin, Luxury Seat, Electric Heater For Engine, Electric Joystick, Quick Hitch, Led Working Lights, Standard Bucket, Electric Hand-Brake, 26*12-16.5 Tyre.

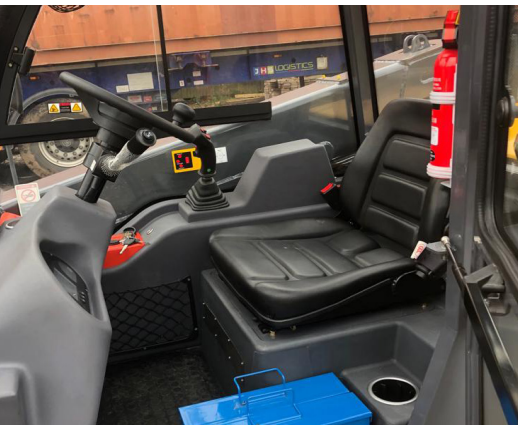

1.0 Engine Details

1.1 Model:	Perkins engine 403D-15
1.2 Engine Type:	In-line arrangement, water-cooled, three-cycle diesel engine
1.3 Rated Power:	20.9KW
1.4 Rated Speed:	2200 r/min(rpm)
1.5 Fuel Consumption ration in Standard working condition:	230g/kw.H

2.0 Transmission System	Hydraulic Motor + 4 Wheel Drive Motors
-------------------------	--

3.0 Standard Bucket

3.1 Bucket capacity:	0.3 m3
3.2 Bucket Width:	1588mm
3.3 Bucket type:	Standard
3.4 Rated load:	1300kg including attachment

4.0 Overall Dimensions

4.1 Overall length (bucket on ground)	3350mm
4.2 Overall Height	1955mm
4.3 Overall width	1588mm
4.4 Max. lifting Height	4010mm

5.0 Operating Specifications

5.1 Steering system:	Rear axle with hydraulic power steering
5.2 Min.turning radius:	3560mm
5.3 Driving system:	Hydraulic Motor, Four Wheel Drive
5.4 Operating Weight:	2800 KG
5.5 Max. Driving Speed:	18km/h
5.6 Other	Quick Coupling System Joystick ; Self-levelling

6.0 Brake System

6.1 Service Brake	Hydraulic Oil Cutting-Off Brake
6.2 Parking Brake	Electrical Parking Brake

7.0 Tyre


7.1 Model	26*12-16.5
7.2 Width	275mm
7.3 Diameter	658mm

8.0 Wheelbase	1720mm
---------------	--------

9.0 Track	1150mm
-----------	--------

10.0 System Pressure

10.1 Driving system	35Mpa ; 46cc
10.2 Work system	24Mpa ; 22L/min

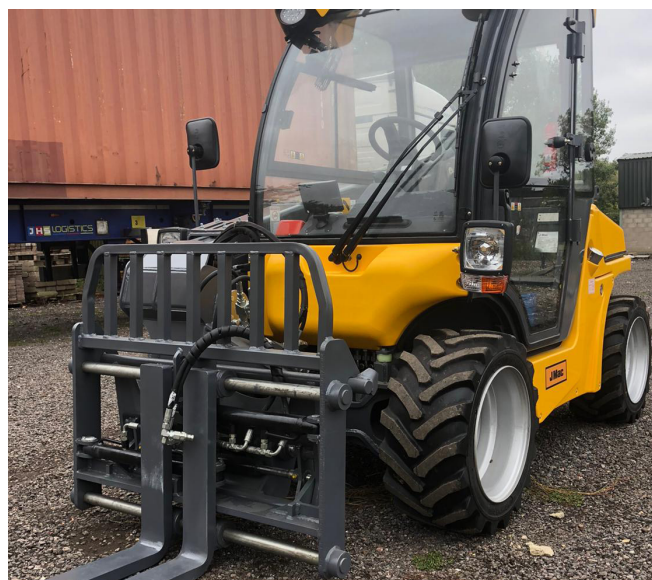

OPTIONS

E4 Lamp
Tyre Chain(front wheel)
Change color
LED working light
Perkins Euro5 Engine

ATTACHMENTS

Pallet Forks
Grapple Bucket
Grapple Forks
Hydraulic adjustable pallet forks
European Grapple forks
4 in 1 Bucket